



E-Z EVENT SYSTEM™ FLAG CANOPY MOUNT

INSTRUCTION SHEET

Includes: (1) Flag Canopy Mount, (2) E-Z Brackets, (1) Hook & Loop Strap



SET UP

1 INSTALLING THE FLAG CANOPY MOUNT ON THE CANOPY LEG


- To start we suggest having the canopy at its lowest height.
- With two people, wrap the bracket around the leg, insert the thumb screw through the upper hole in the Flag Canopy Mount, push the bracket up until it's 18" below the valance, tighten thumb screw until snug. Repeat the process to install the second bracket.
- Insert the assembled E-Z UP® Flag, we recommend 16' maximum for safety reasons (see below for Corner Flag installation).
- Wrap the hook & loop strap around the leg and flagpole just beneath the valance. Thread the strap through the buckle, pull it tight, and fasten it securely.
- If an insert is needed for the bracket to fit snug on the leg, push the center plug into the bracket hole.
 - Thick insert = square 1" legs (VUE™)
 - Thin insert = square 1-1/8" legs (ES100S™, Hi-Viz®, Patriot™, Pyramid™, Vantage™)
 - No insert needed for square 1-1/4" legs (Eclipse™, Eclipse™ HUT, Eclipse™ MAX, Speed Shelter®)
 - No insert needed for octagon 2" legs (Endeavor™, Endeavor™ HUB, Endeavor™ MAX, Endeavor™ USA)
 - No insert needed for hexagon 40mm legs (Express™)




Thin Insert





Thick Insert




Center Plug



Wrong Insert
(Bracket Can't Close)

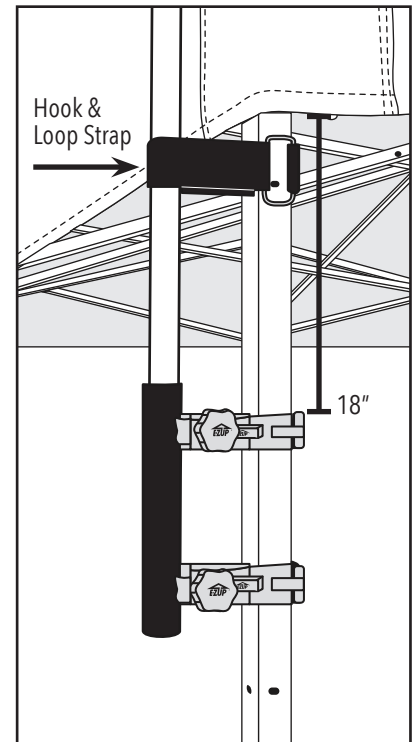

Adapter



CORNER FLAG INSTALLATION

- Insert the Adapter into the Flag Canopy Mount.
- Wrap the hook & loop strap around the leg and flagpole just beneath the valance. Thread the strap through the buckle, pull it tight, and fasten it securely.